

ArXtor lite



INTELLIGENT iSCSI BLU-RAY ARCHIVE LIBRARIES



The DISC ArXtor Lite Series sets a new standard for Blu-ray Archival Storage Systems. Based on DISC's industry proven "touchless" media and reliable robotics technology, the ArXtor Lite Library is an archival storage automation solution for managing 120mm optical media (BD/BDXL/DVD/CD).

Engineered and manufactured in Germany, the ArXtor Lite Libraries are network-attached storage devices, equipped with a web-based user interface to meet the remote management needs of today's demanding IT environments.

An integral iSCSI interface provides a simple, low cost and unifying GigE connection to most network environments, facilitating a standard storage protocol to any Windows and/or Linux system.


The web-based GUI is also available on the front-panel touch display, providing the basis for intuitive local and remote (Java client) setup and diagnostic capabilities, setting a new industry standard for intelligent support of Blu-ray Library systems.

- Long-term Reliability
- Easy to Use & Manage
- Regulatory Compliant
- Lowest TCO
- Green Storage Technology
- Infinite Virtual Capacity

▶ ArXtor LITE FEATURES

- Engineered and Manufactured in Germany
- Patented Touchless 120mm Blu-ray (BD/BDXL/DVD/CD) Media Handling
- iSCSI interface providing simple, low-cost and unifying GigE interface to most network environments, facilitating native storage protocol to any Windows and/or Linux system
- Intelligent front-panel Touch Display and Web-Based GUI (Java)
- Remote Diagnostic and Real-Time BD Drive/Media Monitoring
- Supports Mirroring and Redundant Configurations without additional hardware
- Lowest CAPEX/OPEX Investment of any comparable Archival SAN configuration
- Available in 11U/23U/35U rack-mount and free-standing pedestal configurations

▶ NEW FRONT-PANEL TOUCH DISPLAY

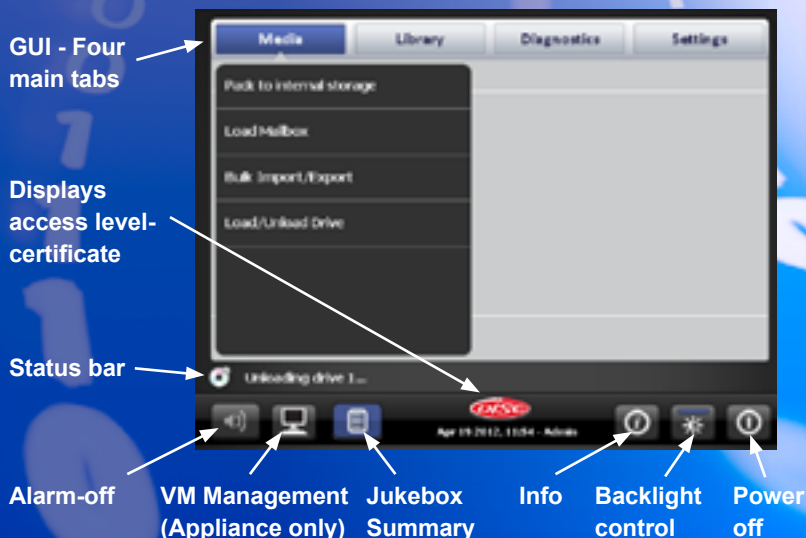

The Future of Archiving Today

ArXtor lite



SPECIFICATIONS DISC ARXTOR LITE

	ArXtor1000	ArXtor4000	ArXtor7000
Library characteristics:			
Capacity TB (BDXL 100GB Media)	1.5 – 10.5	14.5 – 37	51 – 66
Number of drives	1 – 2	2 – 6	2 – 10
Total # of Media Slots	15 – 105	145 – 370	510 – 660
SmartPacks (removable 15-discs)	3 – 4	4	4
Avg. media exchange times (seconds)	2	4	6
Automation connectivity	iSCSI	iSCSI	iSCSI
Drive connectivity	iSCSI	iSCSI	iSCSI
Media formats	BDXL-R, BD-ROM, BD-R, BD-RE, DVD, CD	BDXL-R, BD-ROM, BD-R, BD-RE, DVD, CD	BDXL-R, BD-ROM, BD-R, BD-RE, DVD, CD
Media capacity	Up to 100GB	Up to 100GB	Up to 100GB
Media characteristics	120 mm Single Sided Hard Coated Surface	120 mm Single Sided Hard Coated Surface	120 mm Single Sided Hard Coated Surface
Software Support:			
	Native Support for Windows and Linux	Native Support for Windows and Linux	Native Support for Windows and Linux
Net dimensions / weight:			
Width without stands	290mm / 11.5"	385mm / 15.2"	385mm / 15.2"
Width with stands	n/a	535mm / 21.1"	840mm / 33.1"
Height	451mm / 17.8" (11U)	1020mm / 40.2" (23U)	1547mm / 61" (35U)
Depth	730mm / 28.7"	705mm / 27.8"	705mm / 27.8"
Weight (without media)	30kg / 66lbs	70kg / 154lbs	110kg / 242lbs
Power consumption:			
Average (watts)	120	180	240
Peak (watts)	180	450	920
Power supply (autoswitching):			
	Redundant	Redundant	Redundant
Voltage	100 - 220 VAC	100 - 220 VAC	100 - 220 VAC
Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Current	4 - 8 Amps	4 - 8 Amps	4 - 8 Amps
Thermal emissions in BTU's per hour:			
Average	410	615	820
Peak	615	1,540	3,140

* Product design and specifications (preliminary) are subject to change without notice ** Library/Media Slots shown for 2 drives, for each additional pair of drives, slot count is reduced by 30 slots

► PARTNER INFORMATION

DISC EMEA & ASIA PACIFIC

DISC Archiving Systems B.V.
 Waarderweg 52G
 2031 BP Haarlem
 The Netherlands
 Tel: +31 23 5172 635
 Email: sales@disc-group.com

DISC NORTH-AMERICA

DISC Archiving Systems Inc.
 9609 S. University Blvd. # 631145
 Littleton, Colorado 80163-1145
 USA
 Tel: +1 866 960 9345
 Email: salesUS@disc-group.com